

**PRODUCT DESCRIPTION**

Clean S, Slim and minimal track light. Can be dressed with honey comb, cross louver to enhance the visual quality, reduce glare.

# Clean S Track Light

**TECHNICAL DATA**

**MOUNTING**

Mounting location	Ceiling
Type	Track light
Adaptor	4 wires 3 circuits

**ELECTRICAL**

Input Voltage	AC220-240V
Frequency	50/60HZ

**DRIVER**

Type	Integrated
Voltage & Current	DC36V 200mA
Driver brand	Coic non-dim
Power Factor	>0.5
Dimmable	TRAIC/0-10V/DALI

**LED**

Chips brand	Bridgelux
Chips information	DC36V COB
Power	8w
Color Temperature	2700K/3000K/4000K
CRI	Ra>90

**LAMP**

Material	Die-casting aluminum
Housing color	white/black
Inner ring color	white/black/gold
Beam Angle	15°/25°/38°/50°
Optional angle	7° 7W
Unified glare rating(UGR)	<19
Adjustability	90° tilt and 350° Rotation
Ingress Protection	IP20

**NOMINAL FLUX**

Luminaire lumen efficiency	75-85lm/w
Fitting luminous Flux	2700K 600lm
	3000K 650lm
	4000K 700lm

**Packing Content**

PC/CTN	50pcs
Carton Size	47x41x28cm


**ORDER TEMPLATE**

Item	housing color	Color Temperature	Beam Angle	Item number Example
CS45	B (black)	27 (2700K)	15 (15°)	CS45-B2715
	W (white)	30 (3000K)	24 (24°)	CS45-W3024
		40 (4000K)	38 (38°)	
		40 (4000K)	60 (60°)	
CS4507	B (black)	27 (2700K)	7 (7°)	CS4507-B2715

**PHOTO**



**DIMMENSION**

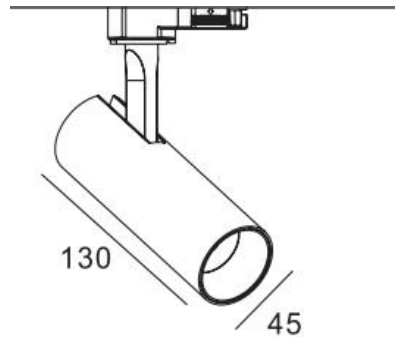

**ACCESSORY**

HONEY COMB

CROSS LOUVER



**PRODUCT DESCRIPTION**

Clean S, Slim and minimal track light. Can be dressed with honey comb, cross louver to enhance the visual quality, reduce glare.

# Clean S Track Light

**TECHNICAL DATA**

**MOUNTING**

Mounting location	Ceiling
Type	Track light
Adaptor	4 wires 3 circuits

**ELECTRICAL**

Input Voltage	AC220-240V
Frequency	50/60HZ

**DRIVER**

Type	Integrated
Voltage & Current	DC36V 500mA
Driver brand	Coic non-dim
Power Factor	>0.5
Dimmable	TCI DALI 6 wires 3 circuits

**LED**

Chips brand	Bridgelux
Chips information	DC36V COB
Power	15w
Color Temperature	2700K/3000K/4000K
CRI	Ra>90

**LAMP**

Material	Die-casting aluminum
Housing color	white/black
Inner ring color	white/black/gold
Beam Angle	15°/25°/38°/50°
Unified glare rating(UGR)	<19
Adjustability	90° tilt and 350° Rotation
Ingress Protection	IP20

**NOMINAL FLUX**

Luminaire lumen efficiency	75-85lm/w
Fitting luminous Flux	2700K 1150lm 3000K 1200lm 4000K 1300lm


**Packing Content**

PC/CTN	30pcs
Carton Size	40x30x35cm

**PHOTO**




**DIMMENSION**

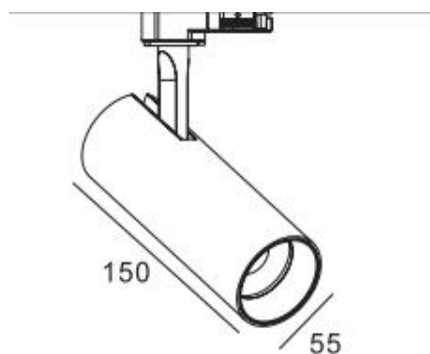

**ACCESSORY**

CROSS LOUVER      HONEY COMB      BARN DOOR

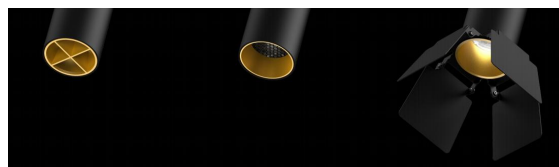

**ORDER TEMPLATE**

Item	housing color	Color Temperature	Beam Angle	Item number Example
CS55	B (black)	27 (2700K)	15 (15°)	CS55-B2715
		30 (3000K)	24 (24°)	CS55-W3024
	W (white)	40 (4000K)	38 (38°)	
		40 (4000K)	60 (60°)	

Clean S, Slim and minimal track light. Can be dressed with honey comb, cross louver to enhance the visual quality, reduce glare.

# Clean S Track Light

**TECHNICAL DATA**

**MOUNTING**

Mounting location	Ceiling
Type	Track light
Adaptor	4 wires 3 circuits

**ELECTRICAL**

Input Voltage	AC220-240V
Frequency	50/60HZ

**DRIVER**

Type	Integrated adaptor
Voltage & Current	DC36V 700mA
Driver brand	OSRAM non-dim
Power Factor	>0.9
Dimmable	TCI DALI 6 wires 3 circuits

**LED**

Chips brand	Bridgelux
Chips information	DC36V COB
Power	25w
Color Temperature	2700K/3000K/4000K
CRI	Ra>90

**LAMP**

Material	Die-casting aluminum
Housing color	white/black
Inner ring color	white/black/gold
Beam Angle	15°/25°/38°/50°
Unified glare rating(UGR)	<19
Adjustability	90° tilt and 350° Rotation
Ingress Protection	IP20

**NOMINAL FLUX**

Luminaire lumen efficiency	75-85lm/w
Fitting luminous Flux	2700K 1850lm 3000K 2000lm 4000K 2200lm


**Packing Content**

PC/CTN	20pcs
Carton Size	47x35x40cm

**PHOTO**




**DIMMENSION**

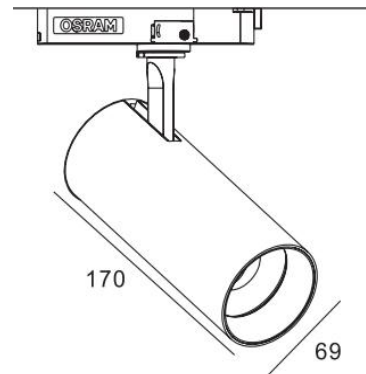

**ACCESSORY**

CROSS LOUVER      HONEY COMB      BARN DOOR

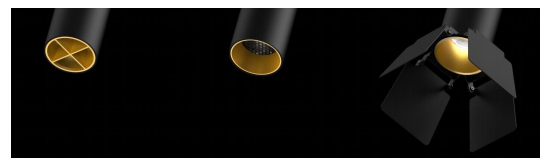

**ORDER TEMPLATE**

Item	housing color	Color Temperature	Beam Angle	Item number Example
CS69	B (black)	27 (2700K)	15 (15°)	CS69-B2715
		30 (3000K)	24 (24°)	CS69-W3024
	W (white)	40 (4000K)	38 (38°)	
		40 (4000K)	60 (60°)	

Clean S, Slim and minimal track light. Can be dressed with honey comb, cross louver to enhance the visual quality, reduce glare.

# Clean S Track Light

**TECHNICAL DATA**
**MOUNTING**

Mounting location	Ceiling
Type	Track light
Adaptor	4 wires 3 circuits

**ELECTRICAL**

Input Voltage	AC220-240V
Frequency	50/60HZ

**DRIVER**

Type	Integrated adaptor
Voltage & Current	DC36V 1000mA
Driver brand	OSRAM non-dim
Power Factor	>0.9
Dimmable	TCI DALI 6 wires 3 circuits

**LED**

Chips brand	Bridgelux
Chips information	DC36V COB
Power	35w
Color Temperature	2700K/3000K/4000K
CRI	Ra>90

**LAMP**

Material	Die-casting aluminum
Housing color	white/black
Inner ring color	white/black/gold
Beam Angle	15°/25°/38°/50°
Unified glare rating(UGR)	<19
Adjustability	90° tilt and 350° Rotation
Ingress Protection	IP20


**NOMINAL FLUX**

Luminaire lumen efficiency	75-85lm/w
Fitting luminous Flux	2700K 2650lm 3000K 2800lm 4000K 3000lm


**Packing Content**

PC/CTN	10pcs
Carton Size	48x24x49cm

**PHOTO**

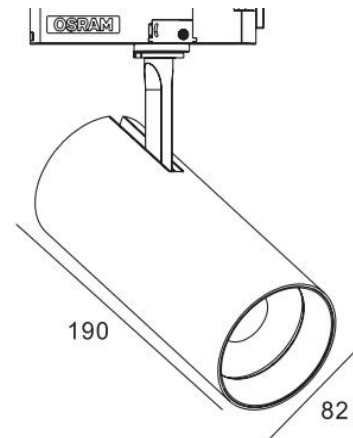**DIMMENSION**

**ACCESSORY**

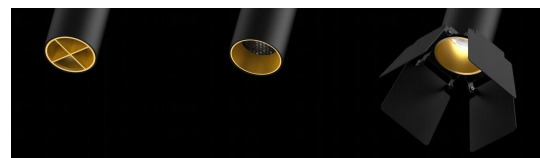CROSS LOUVER      HONEY COMB      BARN DOOR


**ORDER TEMPLATE**

Item	housing color	Color Temperature	Beam Angle	Item number Example
CS82	B (black)	27 (2700K)	15 (15°)	CS82-B2715
		30 (3000K)	24 (24°)	CS82-W3024
	W (white)	40 (4000K)	38 (38°)	
		40 (4000K)	60 (60°)	