




GT-R


From the germ of the mind to the fingertips
From a line in the paper on the caper to blossom
Turn a one into a ten, stretch out an infinite number of possibilities
The infinite possibilities of creating light



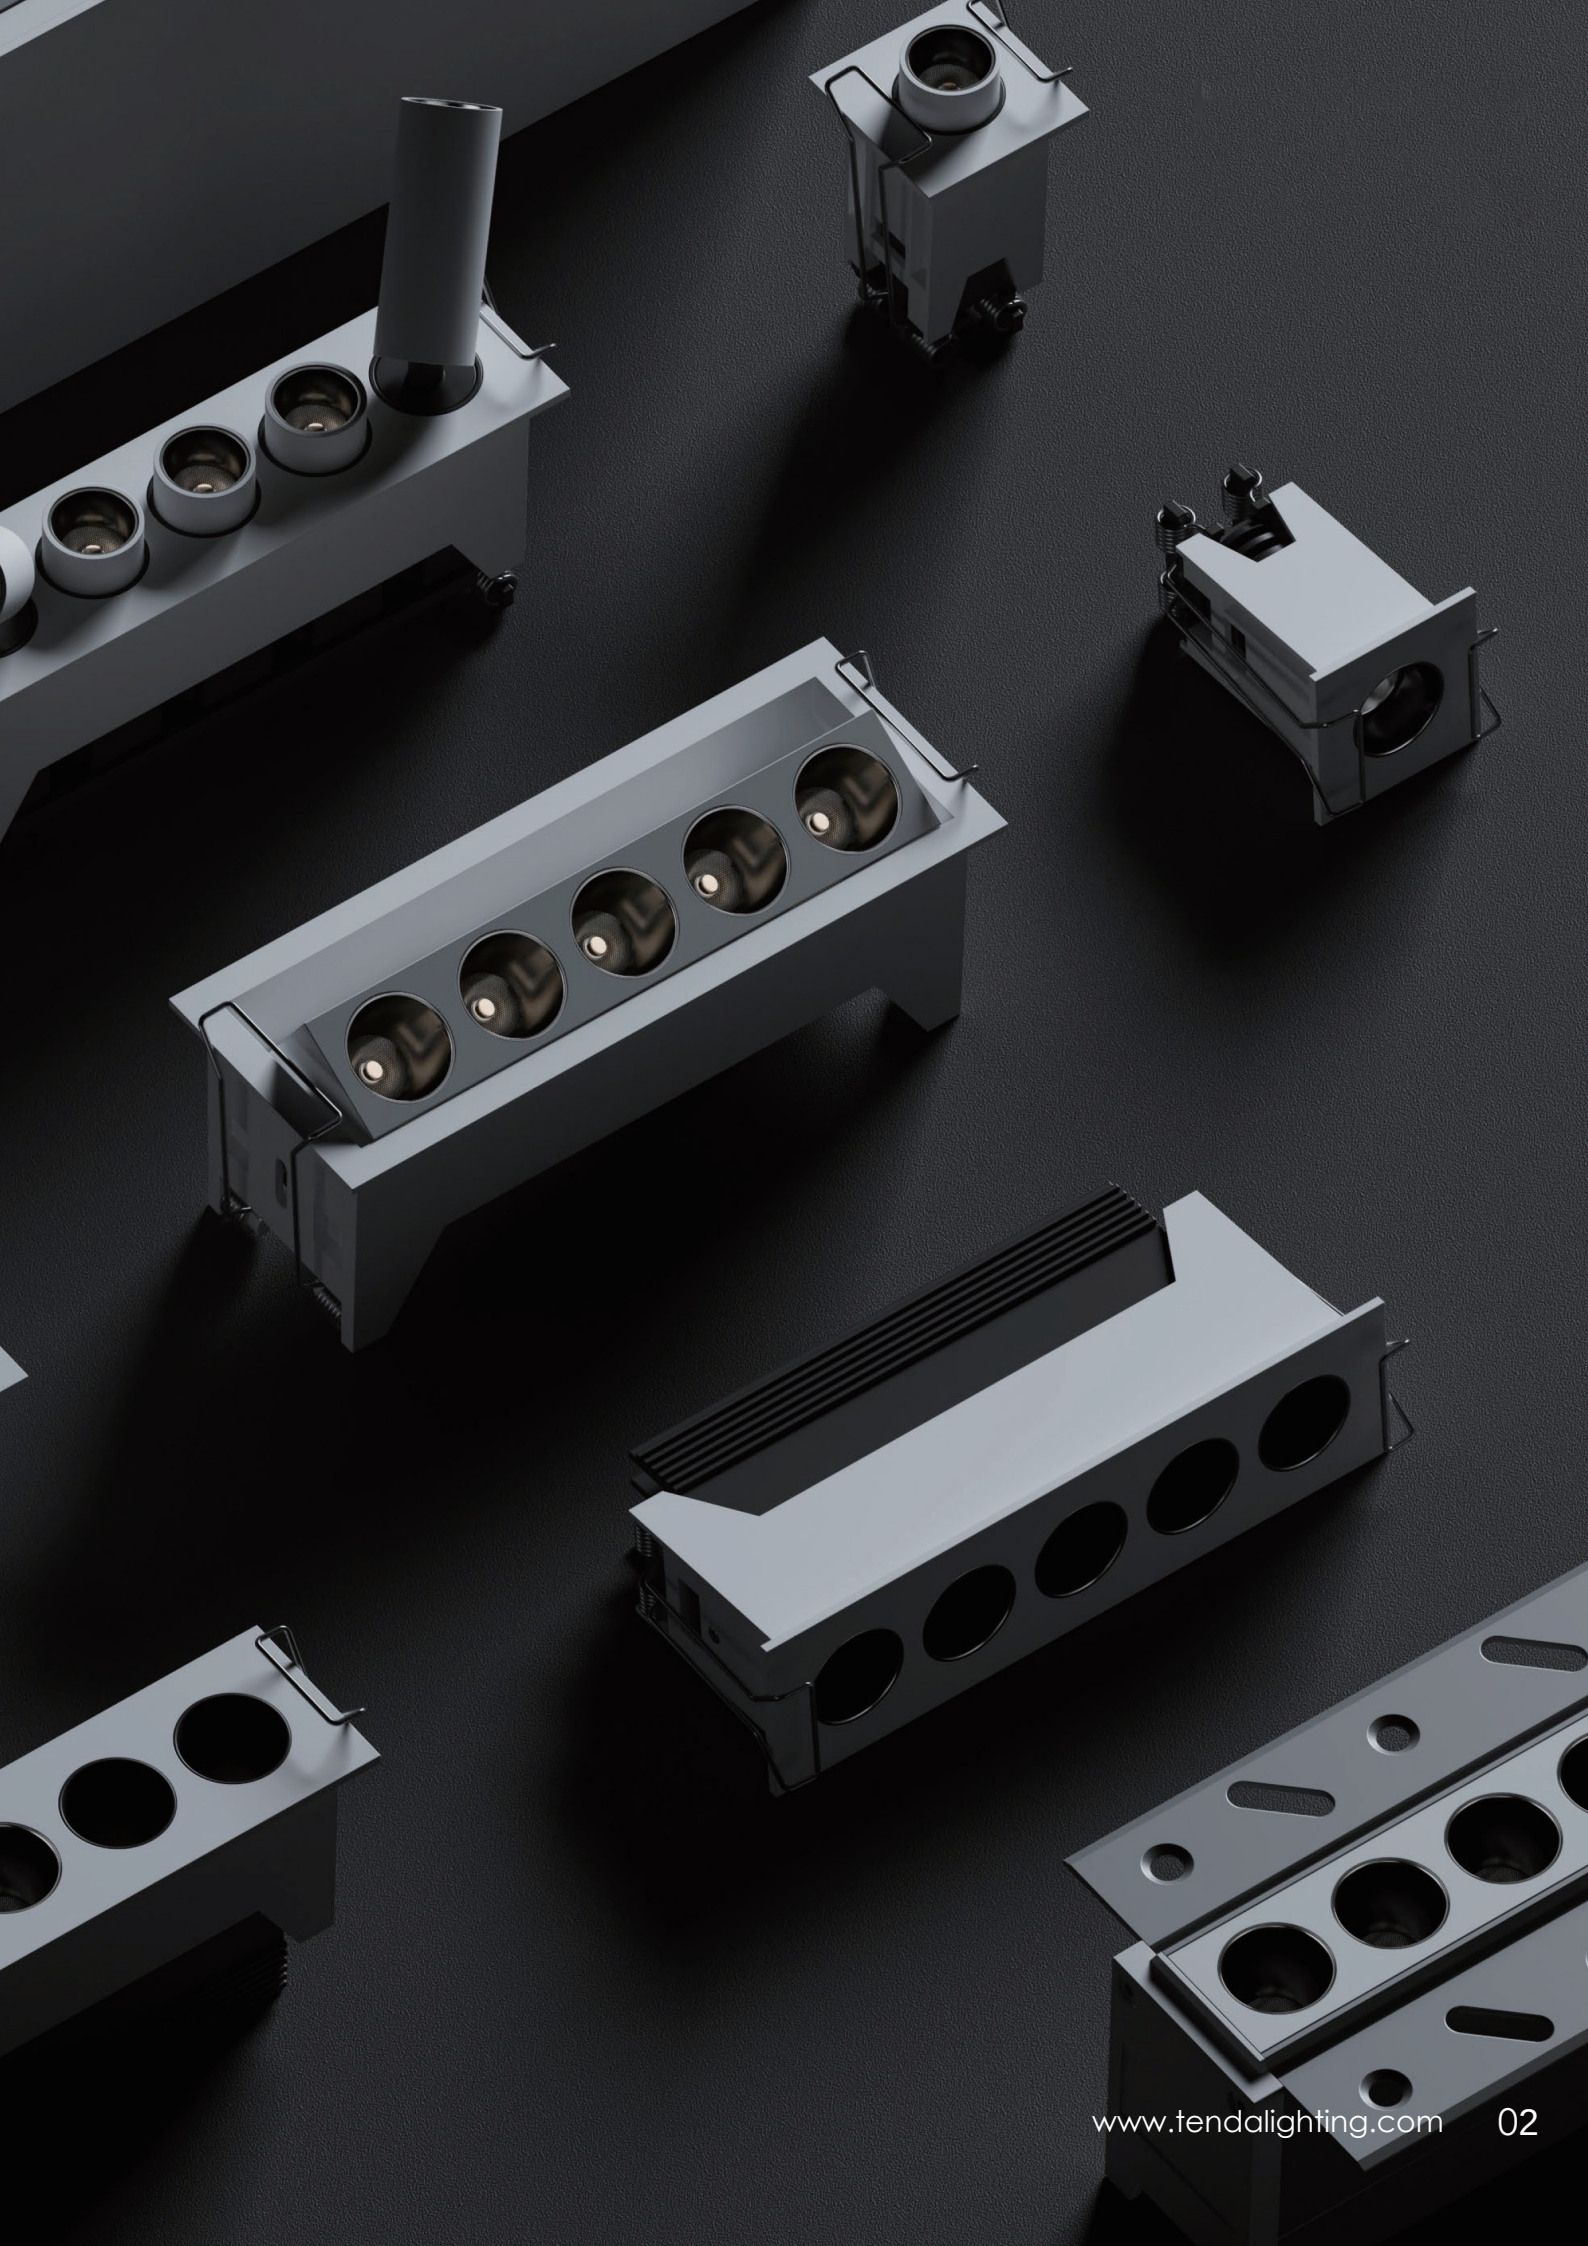

Breakthrough lens optical design

Breakthrough lens optical design of a black hole, so that the light reflects light intersection, define how the light again, don't let the light refraction on the reflectors, matching reflectors of nano-spray technology, blacklight technology upgrades!

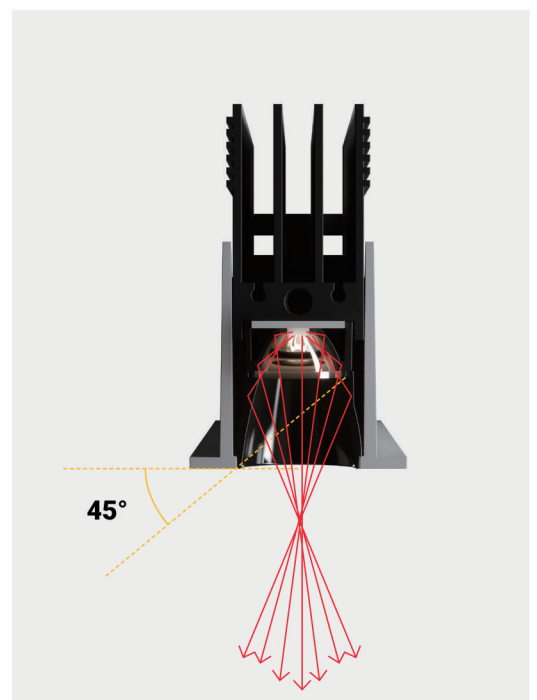





Aluminum Radiator

High brightness led chip 2w/pcs

Hihg transmittance lens

Black light reflector

**MASTERWORK
DESIGN**

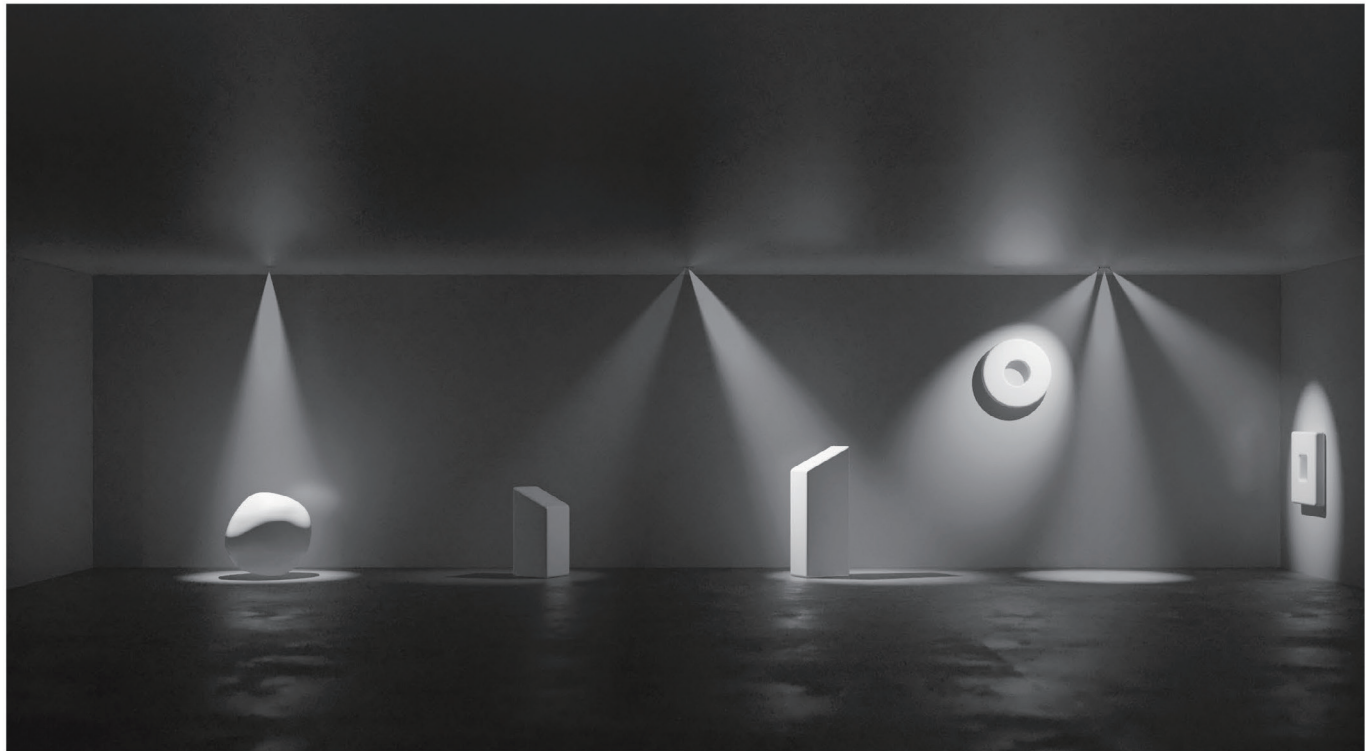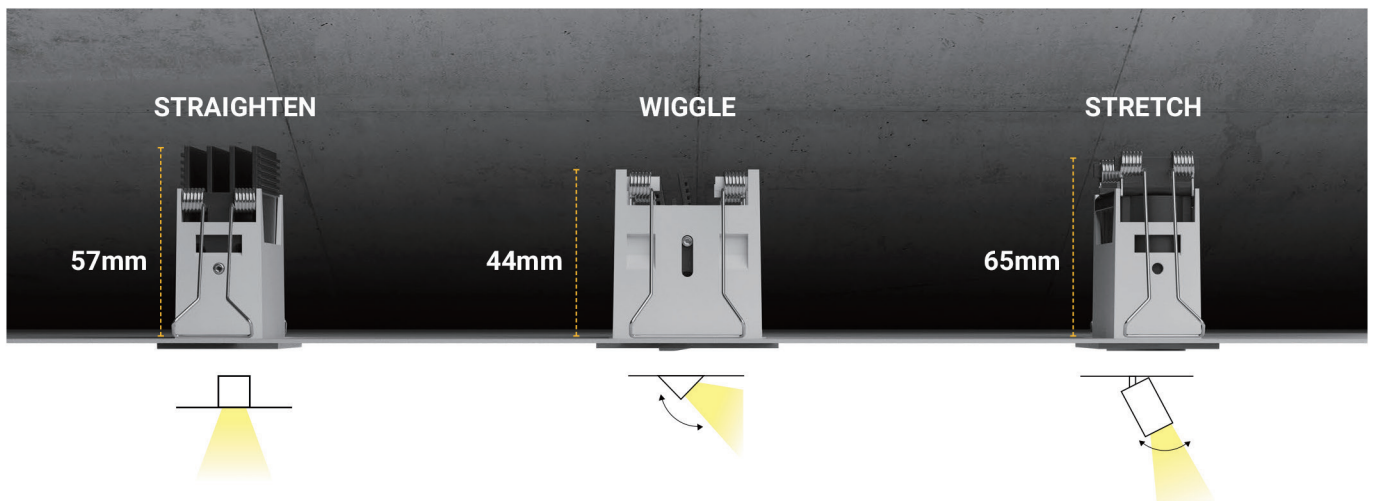

And traditional tube lighting contrast, a high proportion of the GT-R has excellent, can adapt to meet a variety of junior high places, card spring structure of the long arm of force, from 1 mm sheet metal, multi layer gypsum board to 25mm thick, is easy to control, and ensures easy installation and removal. Selected for the user to provide a wide range of features: flood, washing walls, directional lights, adjustable corner, stretch, can be freely combined, the application of different places lighting solutions.







GTR RECESSED SPOTLIGHT





	P	Flux	CCT	Beam	Color	mA
GTR-S01	1*2W	100lm	3000K	24°/36°	B/W	500mA
	1*2W	120lm	4000K	24°/36°	B/W	500mA
	1*2W	130lm	5000K	24°/36°	B/W	500mA




	P	Flux	CCT	Beam	Color	mA
GTR-S03	3*2W	300lm	3000K	24°/36°	B/W	600mA
	3*2W	320lm	4000K	24°/36°	B/W	600mA
	3*2W	330lm	5000K	24°/36°	B/W	600mA




	P	Flux	CCT	Beam	Color	mA
GTR-S05	5*2W	500lm	3000K	24°/36°	B/W	600mA
	5*2W	520lm	4000K	24°/36°	B/W	600mA
	5*2W	530lm	5000K	24°/36°	B/W	600mA

**GTR-S01**

(mm)

**GTR-S03**

(mm)

**GTR-S05**

(mm)

**OPTIONS**


- 1 No DIM
- 2 DIM DALI
- 3 Bluetooth/ZigBee




GTR SURFACE ADJUSTABLE





	P	Flux	CCT	Beam	Color	mA
GTR-SUR03A	3*2W	300lm	3000K	24°/36°	B/W	500mA
	3*2W	320lm	4000K	24°/36°	B/W	500mA
	3*2W	330lm	5000K	24°/36°	B/W	500mA




	P	Flux	CCT	Beam	Color	mA
GTR-SUR05A	5*2W	500lm	3000K	24°/36°	B/W	500mA
	5*2W	520lm	4000K	24°/36°	B/W	500mA
	5*2W	530lm	5000K	24°/36°	B/W	500mA




	P	Flux	CCT	Beam	Color	mA
GTR-SUR10A	10*2W	1000lm	3000K	24°/36°	B/W	600mA
	10*2W	1030lm	4000K	24°/36°	B/W	600mA
	10*2W	1050lm	5000K	24°/36°	B/W	600mA

**GTR-S01**

(mm)

GTR-S05

(mm)

GTR-S03

(mm)

OPTIONS

- 1 No DIM
- 2 DIM DALI
- 3 Bluetooth/ZigBee




GTR ADJUSTABLE DOWNLIGHT





	P	Flux	CCT	Beam	Color	mA
GTR-A03	3*2W	300lm	3000K	24°/36°	B/W	500mA
	3*2W	320lm	4000K	24°/36°	B/W	500mA
	3*2W	330lm	5000K	24°/36°	B/W	500mA




	P	Flux	CCT	Beam	Color	mA
GTR-A05	5*2W	500lm	3000K	24°/36°	B/W	600mA
	5*2W	520lm	4000K	24°/36°	B/W	600mA
	5*2W	530lm	5000K	24°/36°	B/W	600mA




	P	Flux	CCT	Beam	Color	mA
GTR-A10	10*2W	1000lm	3000K	24°/36°	B/W	600mA
	10*2W	1030lm	4000K	24°/36°	B/W	600mA
	10*2W	1050lm	5000K	24°/36°	B/W	600mA




GTR-A03



GTR-A10

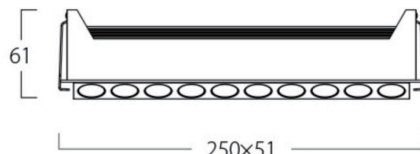

GTR-A05



OPTIONS


- 1 No DIM
- 2 DIM DALI
- 3 Bluetooth/ZigBee



GTR RECESSED DOWNLIGHT





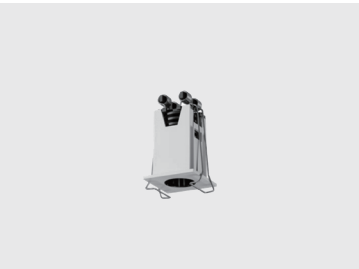

	P	Flux	CCT	Beam	Color	mA
GTR-D01	1*2W	100lm	3000K	24°/36°	B/W	500mA
	1*2W	120lm	4000K	24°/36°	B/W	500mA
	1*2W	130lm	5000K	24°/36°	B/W	500mA

LED

III

UGR<19

IP20

CRI>90

L80B20
>50.000h

MacAdam
Step 3

DIMMABLE

24°/36°



	P	Flux	CCT	Beam	Color	mA
GTR-D03	3*2W	300lm	3000K	24°/36°	B/W	500mA
	3*2W	320lm	4000K	24°/36°	B/W	500mA
	3*2W	330lm	5000K	24°/36°	B/W	500mA

LED

III

UGR<19

IP20

CRI>90


L80B20
>50.000h

MacAdam
Step 3


DIMMABLE

24°/36°

GTR-D01

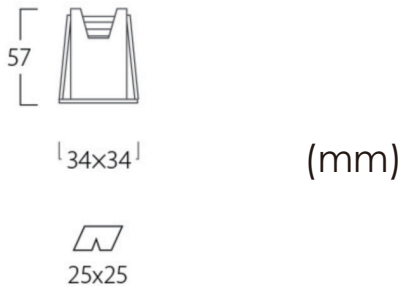

GTR-D03

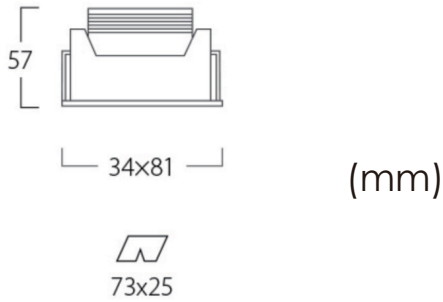

OPTIONS

- 1No DIM
- 2DIM DALI
- 3Bluetooth/ZigBee





	P	Flux	CCT	Beam	Color	mA
GTR-D05	5*2W	500lm	3000K	24°/36°	B/W	500mA
	5*2W	520lm	4000K	24°/36°	B/W	500mA
	5*2W	530lm	5000K	24°/36°	B/W	500mA



UGR<19

IP20

CRI>90

L80B20
>50.000h


	P	Flux	CCT	Beam	Color	mA
GTR-D10	10*2W	1000lm	3000K	24°/36°	B/W	500mA
	10*2W	1020lm	4000K	24°/36°	B/W	500mA
	10*2W	1050lm	5000K	24°/36°	B/W	500mA



UGR<19

IP20

CRI>90

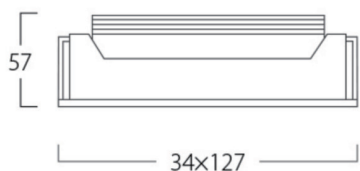L80B20
>50.000h**GTR-D05**

(mm)

**GTR-D10**

(mm)

**OPTIONS**

- 1 No DIM
- 2 DIM DALI
- 3 Bluetooth/ZigBee








	P	Flux	CCT	Beam	Color	mA
GTR-T01	1*2W	100lm	3000K	24°/36°	B/W	500mA
	1*2W	120lm	4000K	24°/36°	B/W	500mA
	1*2W	130lm	5000K	24°/36°	B/W	500mA




	P	Flux	CCT	Beam	Color	mA
GTR-T03	3*2W	300lm	3000K	24°/36°	B/W	600mA
	3*2W	320lm	4000K	24°/36°	B/W	600mA
	3*2W	330lm	5000K	24°/36°	B/W	600mA



GTR-T01

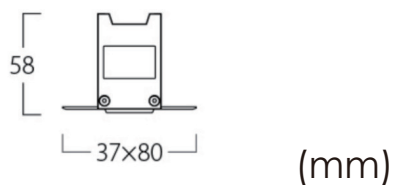

GTR-T03

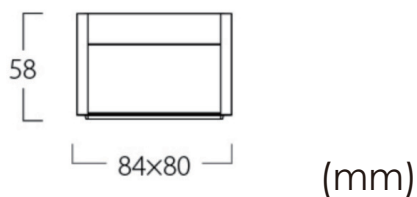

OPTIONS

- 1 No DIM
- 2 DIM DALI
- 3 Bluetooth/ZigBee





	P	Flux	CCT	Beam	Color	mA
GTR-T05	5*2W	500lm	3000K	24°/36°	B/W	500mA
	5*2W	520lm	4000K	24°/36°	B/W	500mA
	5*2W	530lm	5000K	24°/36°	B/W	500mA



UGR<19

IP20

CRI>90

L80B20
>50.000h


	P	Flux	CCT	Beam	Color	mA
GTR-T10	10*2W	1000lm	3000K	24°/36°	B/W	600mA
	10*2W	1020lm	4000K	24°/36°	B/W	600mA
	10*2W	1030lm	5000K	24°/36°	B/W	600mA



UGR<19

IP20


CRI>90

L80B20
>50.000h**GTR-T05**

(mm)



132x40

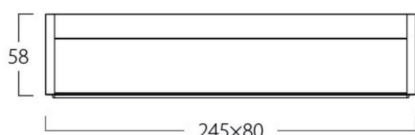GTR-T10

(mm)



247x40

OPTIONS

- 1 No DIM
- 2 DIM DALI
- 3 Bluetooth/ZigBee

COLOUR | BK  WH  |MATERIAL |  AL |**GTR**

GTR TRIMLESS ADJUSTABLE DOWNLIGHT






	P	Flux	CCT	Beam	Color	mA
GTR-TA03	3*2W	300lm	3000K	24°/36°	B/W	500mA
	3*2W	320lm	4000K	24°/36°	B/W	500mA
	3*2W	330lm	5000K	24°/36°	B/W	500mA



	P	Flux	CCT	Beam	Color	mA
GTR-TA05	5*2W	500lm	3000K	24°/36°	B/W	600mA
	5*2W	520lm	4000K	24°/36°	B/W	600mA
	5*2W	530lm	5000K	24°/36°	B/W	600mA




	P	Flux	CCT	Beam	Color	mA
GTR-TA10	10*2W	1000lm	3000K	24°/36°	B/W	600mA
	10*2W	1030lm	4000K	24°/36°	B/W	600mA
	10*2W	1050lm	5000K	24°/36°	B/W	600mA

**GTR-TA03**

(mm)




94x57

GTR-TA05

(mm)



140x57

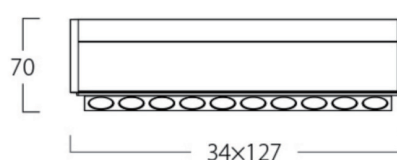GTR-TA10

(mm)





255x57

OPTIONS

- 1 No DIM
- 2 DIM DALI
- 3 Bluetooth/ZigBee



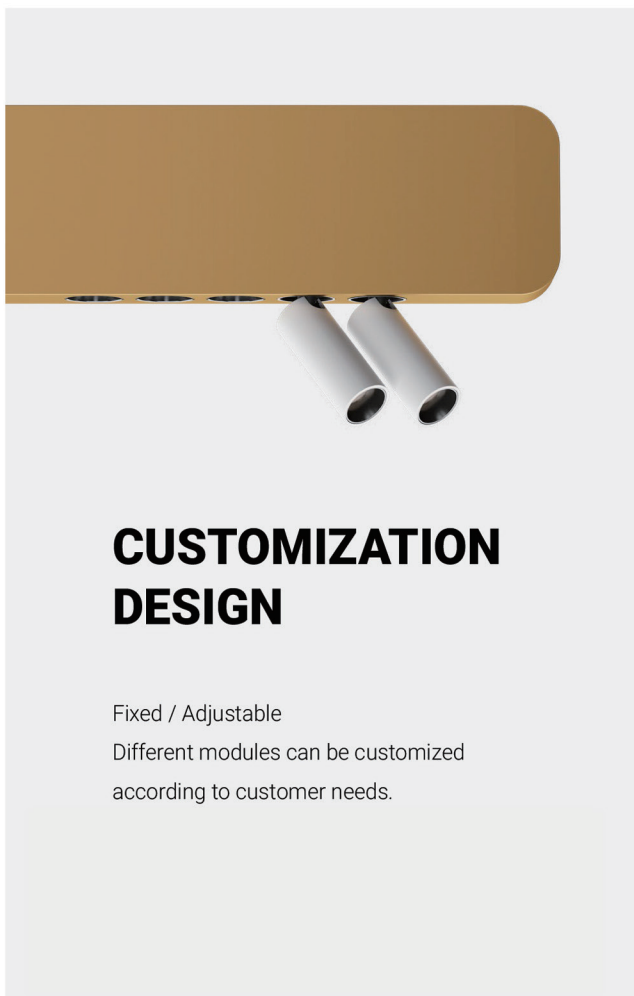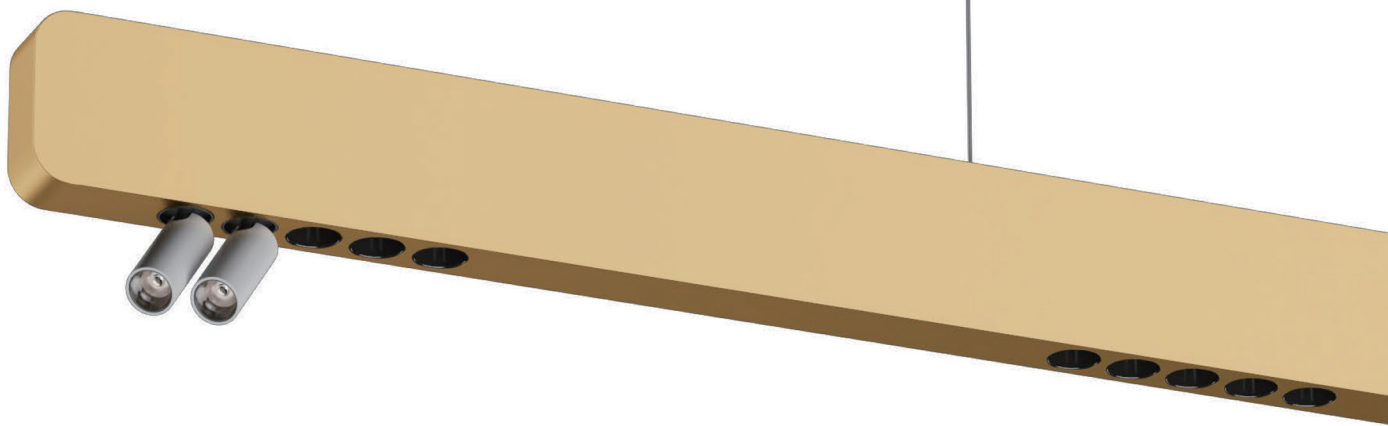

Gold



White




Black



GTR SUSPENDED LINEAR

The minimalist shape and comfortable anti glare optical structure create a natural and pleasant light environment for you.

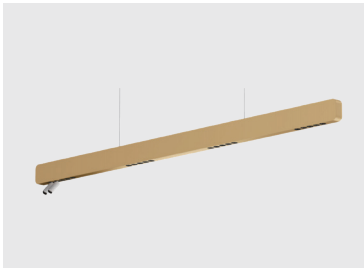

	P	Flux	CCT	Beam	Color	mA
GTR-SUS	20*2W	2050lm	3000K	24°	B/W/G	600mA
	20*2W	2100lm	4000K	24°	B/W/G	600mA
	20*2W	2150lm	5000K	24°	B/W/G	600mA

LED

III

UGR<19

IP20

CRI>90

L80B20
>50.000h

MacAdam
Step 3


DIMMABLE

24°

350°

90°

GTR-SUS

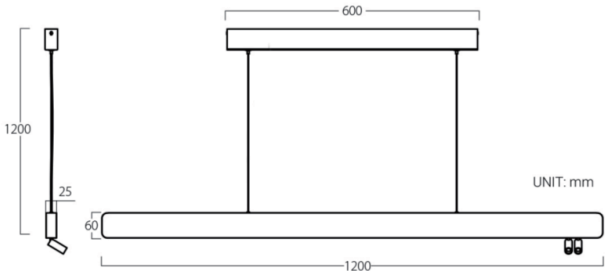

OPTIONS

- 1

No DIM
- 2

DIM DALI
- 3

Bluetooth/ZigBee

