


Date
Customer
Project
Type

LARA 2.0



LARA 2.0, a range of surface downlight with various finishing option, IP44 waterproof

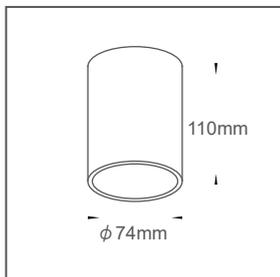

Specifications

Model No.	LARA2.0-12
Power	12w
Lamp Lumen	600-800 lm (50-70 lm/w)
CCT	2700K / 3000K / 4000K / 5700K
Beam Angle	15° / 24° / 36° / 50°
CRI	>90
Housing Finishing	white / black / customized
Reflector Color	white / black
Reflector Material	PC
Housing Material	Die-casting aluminum
UGR	<10
IP Rating	44
Adjustability	Fixed
Chips Brand	BRIDGELUX / EVERCORE
Chips Information	LED COB, DC36V
Binning	3 Step MacAdam
Size (mm)	φ 74×110
Lifetime	LM80 >50,000 Hours
Number of Light Sources	1
Input Voltage	AC220-240V / AC100-277V
Electrical Class	II
Indoor/Outdoor	Indoor
Mounting	Ceiling Surface mounted
Driver Type	Integrated Constant current
Driver Brand	COIC
Controls	NON DIM / TRIAC
Power Factor	>0.5 (TRIAC>0.9)
Frequency	50 / 60HZ
Drive current (mA)	300



More finishing option, customized available





LARA 2.0

Light distribution & beam diagram

12W 15°

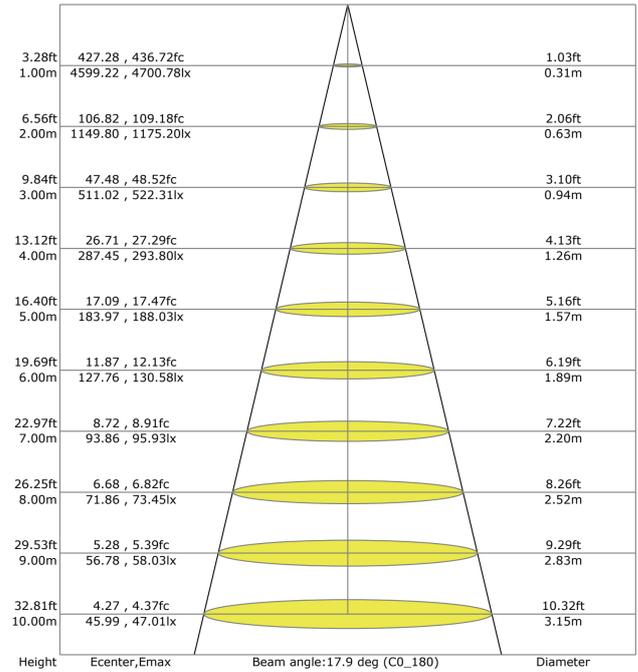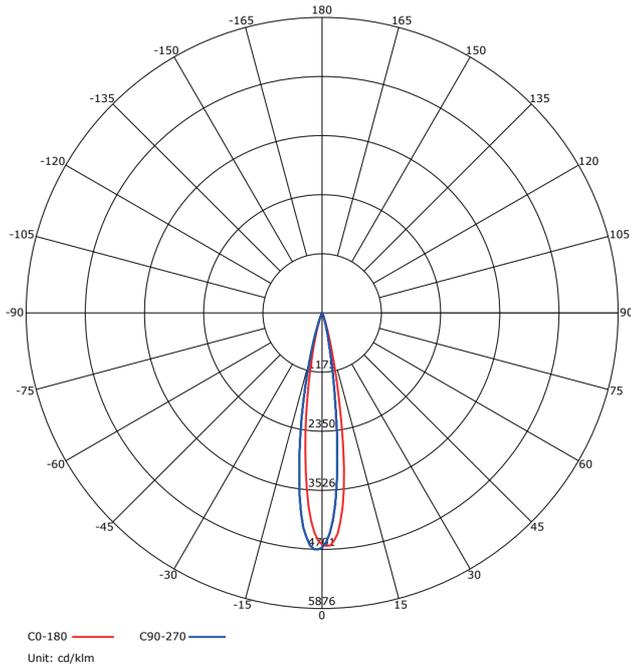



12W 24°

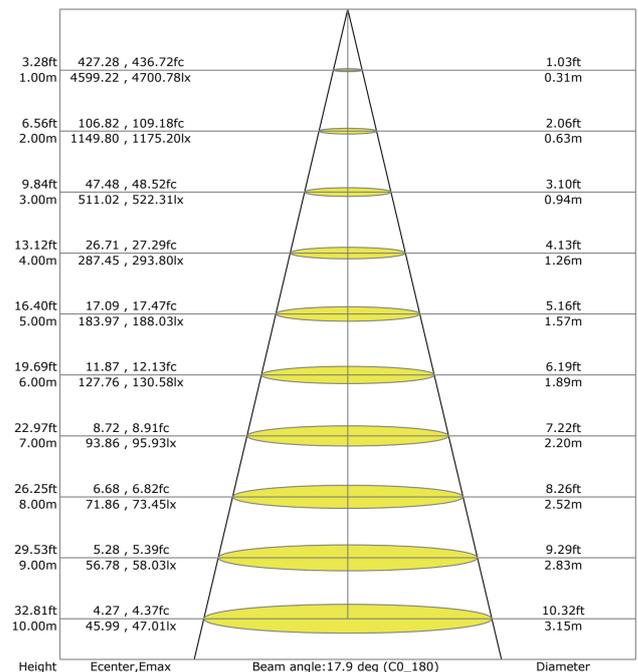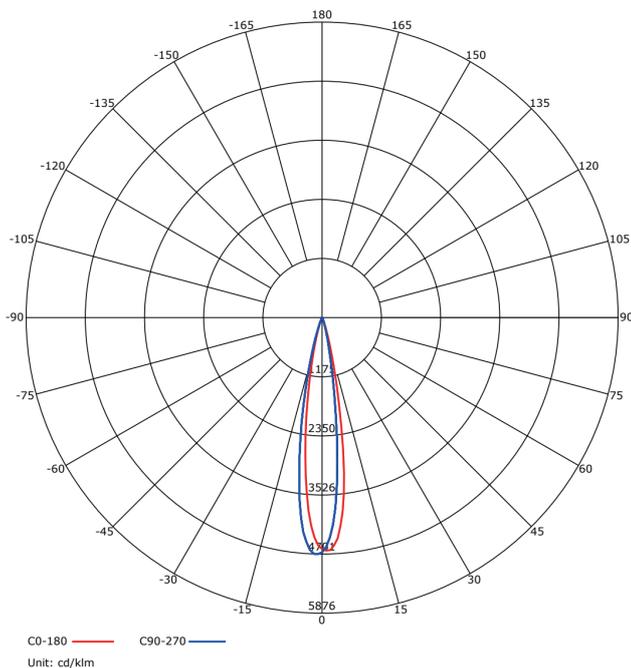

LARA 2.0

Light distribution & beam diagram

12W 36°

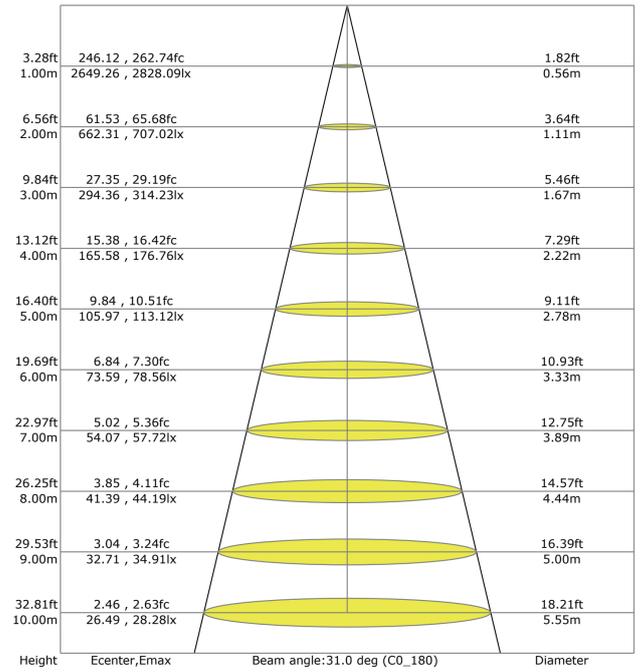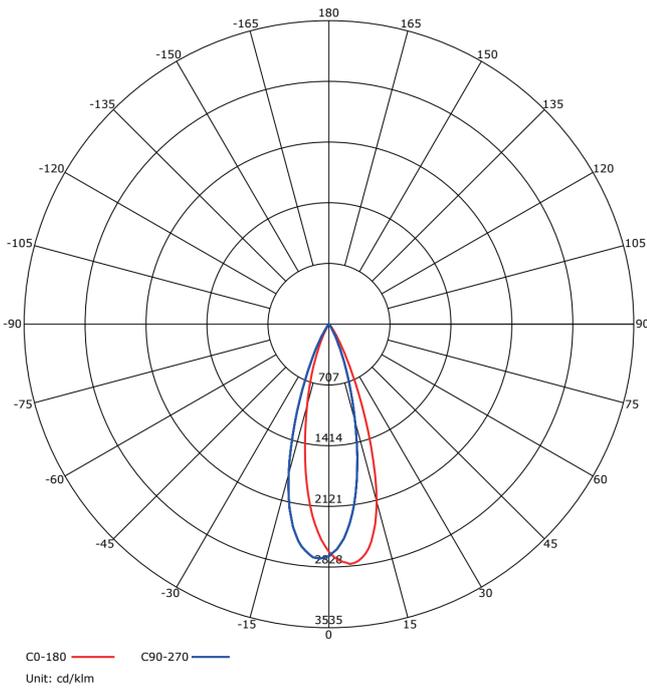

12W 50°

