

PRODUCT DESCRIPTION

Sharp projector designed for high-end museum & gallery, creat sharp-focus and soft-fo-cus on the art works.

Sharp projector

TECHNICAL DATA

MOUNTING

Mounting location	Ceiling
Type	Track light
Adaptor	4 wires 3 circuits

ELECTRICAL

Input Voltage	AC220-240V
Frequency	50/60HZ

DRIVER

Type	driver in the case
Driver brand	Rxpower
Power Factor	>0.5
Dimming Option	dim on boad

LED

Chips brand	Citizen
Power	20w
Color Temperature	2700K/3000K/4000K
CRI	Ra>97

LAMP

Material	Die-casting aluminum
Housing color	black
Beam Angle	3~30°/3~45°
Ingress Protection	IP20
UGR	<19


NOMINAL FLUX

Fitting luminous Flux	700lm
Luminaire lumen efficiency	35lm/w

PHOTO



DIMMENSION

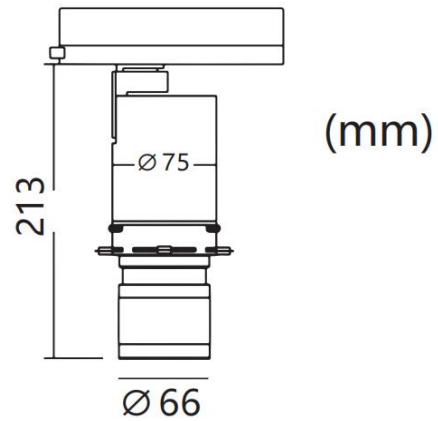

ORDER TEMPLATE

Item	housing color	Color Temperature	Beam Angle	Item number Example
SHA-PRO20	B (black)	27 (2700K)	3~30°	SHA-PRO20-B27
		30 (3000K)	3~45°	SHA-PRO20-B30
		40 (4000K)		SHA-PRO20-B40