

PRODUCT DESCRIPTION

Unique and Quality downlight UGR, feature by its anti-glare diffuser, UGR<22, Ra90, lumen efficiency 80-90lm/w. Pure die-casting aluminum housing

UGR Downlight

TECHNICAL DATA

MOUNTING

Mounting location	Ceiling
Type	Recessed
Cut-out:	φ75mm

ELECTRICAL

Input Voltage	AC220-240V
Frequency	50/60HZ

DRIVER

Type	Remote
Voltage & Current	DC15V 300mA
Driver brand	Lifud
Power Factor	>0.5
Dimming Option	TRIAC/0-10V/DALI/tunable white

LED

Chips brand	Hongli
Chips information	SMD2835 30leds
Power	5w
Color Temperature	3000K/4000K/5000K/2700-6000K
CRI	Ra>90

LAMP

Material	Die-casting aluminum
Frame color	white/black
Inner trim color	white/black/red/gold/silver
Beam Angle	112°
Unified glare rating(UGR)	<22
Ingress Protection	IP20 whole lamp / IP44 in front

NOMINAL FLUX

Luminaire lumen efficiency	80-90lm/w
Fitting luminous Flux	3000K 400lm 4000K 425lm 5000K 450lm

Packing Content

PC/CTN	50pcs
G.W.	12kgs
Carton Size	57x36x40cm

ORDER TEMPLATE

Item	housing color	Inner trim color	Beam Angle	Item number Example
UGR05	B (black)	B (black)	30 (3000K)	UGR05-B30
	W (white)	W (white)	40 (4000K)	UGR05-W40
	W (white)	B (black)	50 (5000K)	UGR05-WB40
	W (white)	G (gold)	40 (4000K)	UGR05-WG40
	W (white)	S (silver)	40 (4000K)	UGR05-WS40
	W (white)	R (red)	40 (4000K)	UGR05-WR40


PHOTO



Inner Trim Color Option



DIMMENSION

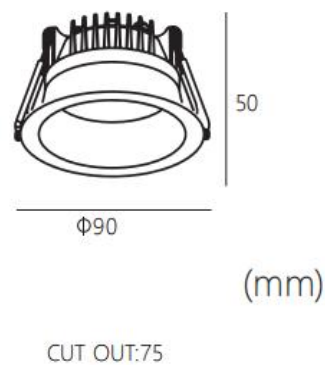

PRODUCT DESCRIPTION

Unique and Quality downlight UGR, feature by its anti-glare diffuser, UGR<22, Ra90, lumen efficiency 80-90lm/w. Pure die-casting aluminum housing

UGR Downlight

TECHNICAL DATA

MOUNTING

Mounting location	Ceiling
Type	Recessed
Cut-out:	φ90mm

ELECTRICAL

Input Voltage	AC220-240V
Frequency	50/60HZ

DRIVER

Type	Remote
Voltage & Current	DC36V 300mA
Driver brand	Lifud
Power Factor	>0.5
Dimming Option	TRIAC/0-10V/DALI/tunable white

LED

Chips brand	Hongli
Chips information	SMD2835 60leds
Power	10w
Color Temperature	3000K/4000K/5000K/2700-6000K
CRI	Ra>90

LAMP

Material	Die-casting aluminum
Frame color	white/black
Inner trim color	white/black/red/gold/silver
Beam Angle	112°
Unified glare rating(UGR)	<22
Ingress Protection	IP20 whole lamp / IP44 in front

NOMINAL FLUX

Luminaire lumen efficiency	80-90lm/w
Fitting luminous Flux	3000K 800lm 4000K 850lm 5000K 900lm


Packing Content

PC/CTN	50pcs
G.W.	15kgs
Carton Size	57x36x40cm

ORDER TEMPLATE

Item	housing color	Inner trim color	Beam Angle	Item number Example
UGR10	B (black)	B (black)	30 (3000K)	UGR10-B30
	W (white)	W (white)	40 (4000K)	UGR10-W40
	W (white)	B (black)	50 (5000K)	UGR10-WB40
	W (white)	G (gold)	40 (4000K)	UGR10-WG40
	W (white)	S (silver)	40 (4000K)	UGR10-WS40
	W (white)	R (red)	40 (4000K)	UGR10-WR40


PHOTO

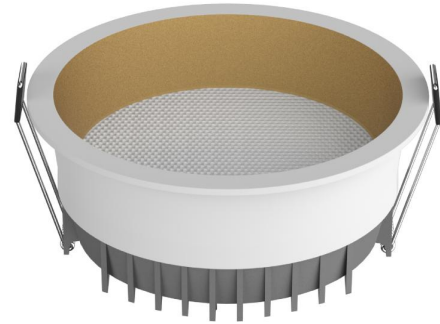

Inner Trim Color Option



DIMMENSION

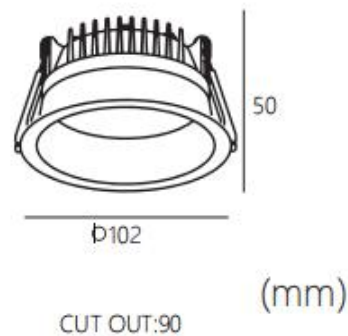

PRODUCT DESCRIPTION

Unique and Quality downlight UGR, feature by its anti-glare diffuser, UGR<22, Ra90, lumen efficiency 80-90lm/w. Pure die-casting aluminum housing

UGR Downlight

TECHNICAL DATA

MOUNTING

Mounting location	Ceiling
Type	Recessed
Cut-out:	φ120mm

ELECTRICAL

Input Voltage	AC220-240V
Frequency	50/60HZ

DRIVER

Type	Remote
Voltage & Current	DC36V 350mA
Driver brand	Lifud
Power Factor	>0.5
Dimming Option	TRIAC/0-10V/DALI/tunable white

LED

Chips brand	Hongli
Chips information	SMD2835 72leds
Power	15w
Color Temperature	3000K/4000K/5000K/2700-6000K
CRI	Ra>90

LAMP

Material	Die-casting aluminum
Frame color	white/black
Inner trim color	white/black/red/gold/silver
Beam Angle	112°
Unified glare rating(UGR)	<22
Ingress Protection	IP20 whole lamp / IP44 in front

NOMINAL FLUX

Luminaire lumen efficiency	80-90lm/w
Fitting luminous Flux	3000K 1200lm 4000K 1300lm 5000K 1400lm

Packing Content

PC/CTN	30pcs
G.W.	15kgs
Carton Size	47x42x40cm

ORDER TEMPLATE

Item	housing color	Inner trim color	Beam Angle	Item number Example
UGR15	B (black)	B (black)	30 (3000K)	UGR15-B30
	W (white)	W (white)	40 (4000K)	UGR15-W40
	W (white)	B (black)	50 (5000K)	UGR15-WB40
	W (white)	G (gold)	40 (4000K)	UGR15-WG40
	W (white)	S (silver)	40 (4000K)	UGR15-WS40
	W (white)	R (red)	40 (4000K)	UGR15-WR40


PHOTO



Inner Trim Color Option



DIMMENSION

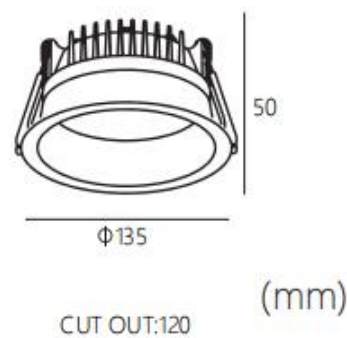

PRODUCT DESCRIPTION

Unique and Quality downlight UGR, feature by its anti-glare diffuser, UGR<22, Ra90, lumen efficiency 80-90lm/w. Pure die-casting aluminum housing

UGR Downlight

TECHNICAL DATA

MOUNTING

Mounting location	Ceiling
Type	Recessed
Cut-out:	φ160mm

ELECTRICAL

Input Voltage	AC220-240V
Frequency	50/60HZ

DRIVER

Type	Remote
Voltage & Current	DC36V 500mA
Driver brand	Lifud
Power Factor	>0.9
Dimming Option	TRIAC/0-10V/DALI/tunable white

LED

Chips brand	Hongli
Chips information	SMD2835 72leds
Power	20w
Color Temperature	3000K/4000K/5000K/2700-6000K
CRI	Ra>90

LAMP

Material	Die-casting aluminum
Frame color	white/black
Inner trim color	white/black/red/gold/silver
Beam Angle	112°
Unified glare rating(UGR)	<22
Ingress Protection	IP20 whole lamp / IP44 in front

NOMINAL FLUX

Luminaire lumen efficiency	80-90lm/w
Fitting luminous Flux	3000K 1600lm
	4000K 1700lm
	5000K 1800lm

Packing Content

PC/CTN	20pcs
G.W.	15.5kgs
Carton Size	52x40x40cm


PHOTO



Inner Trim Color Option



DIMMENSION

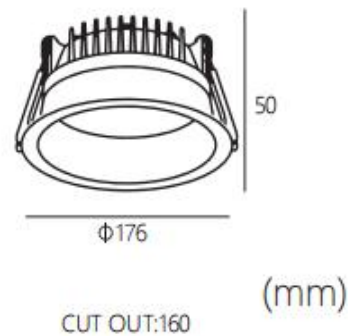

ORDER TEMPLATE

Item	housing color	Inner trim color	Beam Angle	Item number Example
UGR20	B (black)	B (black)	30 (3000K)	UGR20-B30
	W (white)	W (white)	40 (4000K)	UGR20-W40
	W (white)	B (black)	50 (5000K)	UGR20-WB40
	W (white)	G (gold)	40 (4000K)	UGR20-WG40
	W (white)	S (silver)	40 (4000K)	UGR20-WS40
	W (white)	R (red)	40 (4000K)	UGR20-WR40

PRODUCT DESCRIPTION

Unique and Quality downlight UGR, feature by its anti-glare diffuser, UGR<22, Ra90, lumen efficiency 80-90lm/w. Pure die-casting aluminum housing

UGR Downlight

TECHNICAL DATA

MOUNTING

Mounting location	Ceiling
Type	Recessed
Cut-out:	φ200mm

ELECTRICAL

Input Voltage	AC220-240V
Frequency	50/60HZ

DRIVER

Type	Remote
Voltage & Current	DC36V 750mA
Driver brand	Lifud
Power Factor	>0.9
Dimming Option	TRIAC/0-10V/DALI/tunable white

LED

Chips brand	Hongli
Chips information	SMD2835 72leds
Power	30w
Color Temperature	3000K/4000K/5000K/2700-6000K
CRI	Ra>90

LAMP

Material	Die-casting aluminum
Frame color	white/black
Inner trim color	white/black/red/gold/silver
Beam Angle	112°
Unified glare rating(UGR)	<22
Ingress Protection	IP20 whole lamp / IP44 in front

NOMINAL FLUX

Luminaire lumen efficiency	80-90lm/w
Fitting luminous Flux	3000K 2400lm 4000K 2600lm 5000K 2700lm

Packing Content

PC/CTN	20pcs
G.W.	20.6kgs
Carton Size	59x48x40cm

ORDER TEMPLATE

Item	housing color	Inner trim color	Beam Angle	Item number Example
UGR30	B (black)	B (black)	30 (3000K)	UGR30-B30
	W (white)	W (white)	40 (4000K)	UGR30-W40
	W (white)	B (black)	50 (5000K)	UGR30-WB40
	W (white)	G (gold)	40 (4000K)	UGR30-WG40
	W (white)	S (silver)	40 (4000K)	UGR30-WS40
	W (white)	R (red)	40 (4000K)	UGR30-WR40

PHOTO



Inner Trim Color Option



DIMMENSION

