

## PRODUCT DESCRIPTION

Raster Track light, linear light fixture but give round light distribution. Feature by its anti-glare and visual comfort. You can never see where lights come from

# Raster Track Light

## TECHNICAL DATA

### MOUNTING

Mounting location	Ceiling
Type	Track light
Adaptor	4 wires 3 circuits

### ELECTRICAL

Input Voltage	AC220-240V
Frequency	50/60HZ

### DRIVER

Type	Integrated
Voltage & Current	DC15V 700mA
Driver brand	Kegu non-dim
Power Factor	>0.5
Dimmable	TRAIC/0-10V/DALI

### LED

Chips brand	Bridgelux
Chips information	SMD3535 5leds
Power	10w
Color Temperature	2700K/3000K/4000K
CRI	Ra>90

### LAMP

Material	Die-casting aluminum
Housing color	white/black
Reflector color	Matt black
Beam Angle	15°/30°/45°
Unified glare rating(UGR)	<16
Adjustibility	70° tilt and 345° Rotation
Ingress Protection	IP20

### NOMINAL FLUX

Luminaire lumen efficiency	70-80lm/w
Fitting luminous Flux	2700K 700lm 3000K 750lm 4000K 800lm

### Packing Content

PC/CTN	30pcs
Carton Size	46x33x25cm


## ORDER TEMPLATE

Item	housing color	Color Temperature	Beam Angle	Item number Example
RA-TRA10	B (black)	27 (2700K)	15 (15°)	RA-TRA10-B2715
	W (white)	30 (3000K)	30 (30°)	RA-TRA10-W3030
		40 (4000K)	45 (45°)	

## PHOTO



## DIMMENSION

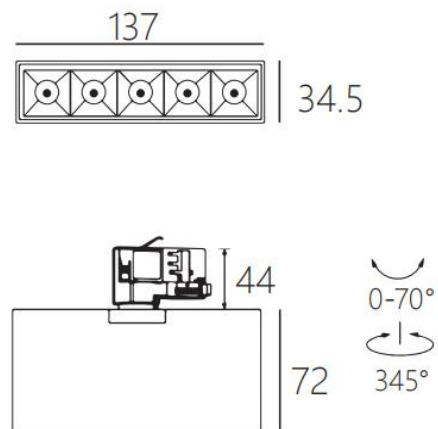

(mm)

## PRODUCT DESCRIPTION

Raster Track light, linear light fixture but give round light distribution. Feature by its anti-glare and visual comfort. You can never see where lights come from

# Raster Track Light

## TECHNICAL DATA

### MOUNTING

Mounting location	Ceiling
Type	Track light
Adaptor	4 wires 3 circuits

### ELECTRICAL

Input Voltage	AC220-240V
Frequency	50/60HZ

### DRIVER

Type	Integrated
Voltage & Current	DC30V 700mA
Driver brand	Kegu non-dim
Power Factor	>0.9
Dimmable	TRAIC/0-10V/DALI

### LED

Chips brand	Bridgelux
Chips information	SMD3535 10leds
Power	20w
Color Temperature	2700K/3000K/4000K
CRI	Ra>90

### LAMP

Material	Die-casting aluminum
Housing color	white/black
Reflector color	Matt black
Beam Angle	15°/30°/45°
Unified glare rating(UGR)	<16
Adjustibility	70° tilt and 345° Rotation
Ingress Protection	IP20

### NOMINAL FLUX

Luminaire lumen efficiency	70-80lm/w
Fitting luminous Flux	2700K 1400lm 3000K 1500lm 4000K 1600lm


### Packing Content

PC/CTN	20pcs
Carton Size	60x31x25cm


## ORDER TEMPLATE

Item	housing color	Color Temperature	Beam Angle	Item number Example
RA-TRA20	B (black)	27 (2700K)	15 (15°)	RA-TRA20-B2715
	W (white)	30 (3000K)	30 (30°)	RA-TRA20-W3030
		40 (4000K)	45 (45°)	

## PHOTO

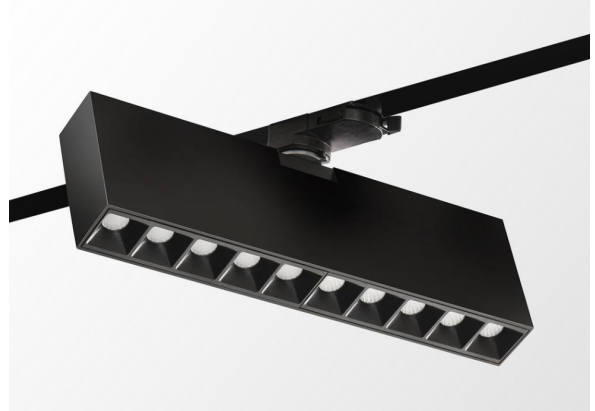

## DIMMENSION

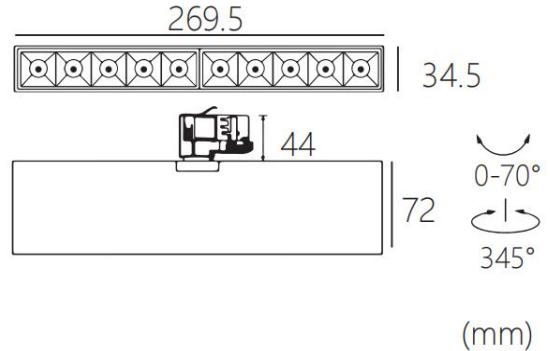

## PRODUCT DESCRIPTION

Raster Track light, linear light fixture but give round light distribution. Feature by its anti-glare and visual comfort. You can never see where lights come from

# Raster Track Light

## TECHNICAL DATA

### MOUNTING

Mounting location	Ceiling
Type	Track light
Adaptor	4 wires 3 circuits

### ELECTRICAL

Input Voltage	AC220-240V
Frequency	50/60HZ

### DRIVER

Type	Integrated
Voltage & Current	DC45V 700mA
Driver brand	Kegu non-dim
Power Factor	>0.9
Dimmable	TRAIC/0-10V/DALI

### LED

Chips brand	Bridgelux
Chips information	SMD3535 15leds
Power	30w
Color Temperature	2700K/3000K/4000K
CRI	Ra>90

### LAMP

Material	Die-casting aluminum
Housing color	white/black
Reflector color	Matt black
Beam Angle	15°/30°/45°
Unified glare rating(UGR)	<16
Adjustibility	70° tilt and 345° Rotation
Ingress Protection	IP20

### NOMINAL FLUX

Luminaire lumen efficiency	70-80lm/w
Fitting luminous Flux	2700K 2100lm 3000K 2250lm 4000K 2400lm


### Packing Content

PC/CTN	10pcs
Carton Size	44x31x25cm

## ORDER TEMPLATE

Item	housing color	Color Temperature	Beam Angle	Item number Example
RA-TRA30	B (black)	27 (2700K)	15 (15°)	RA-TRA30-B2715
	W (white)	30 (3000K)	30 (30°)	RA-TRA30-W3030
		40 (4000K)	45 (45°)	

## PHOTO

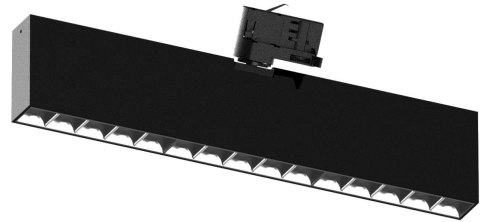

## DIMMENSION

